



10.4" Semi-rugged
Tablet PC



IP54 sealing and build to
withstand a 90 cm drop

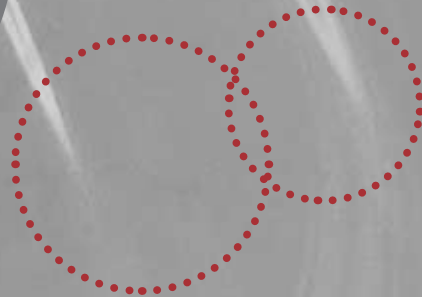

2 Mpixel camera, barcode
reader and 3G module option



PaceBlade

ELEGANTLY RUGGED DESIGN...

The PaceBook RP550 Tablet PC combines a durable, shock-resistant, IP54 sealed, magnesium alloy housing built to withstand a 90 cm drop with the reliable Intel Atom Z530P processor and powerful functionality, like Wireless LAN, Bluetooth, 3G WWAN, a 10.4" LED backlit sunlight readable XGA screen, a 2.0 Mpixel camera to best suit all your needs.

Plus with the rich amount of I/O ports, consisting of two USB 2.0 ports, a serial port, a LAN port and a VGA port and with almost every thinkable option, like a hot swappable external battery to sustain long battery life, a desk docking station which adds two USB 2.0 ports, a serial port, a LAN port and an external battery charging slot, a barcode reader, RFID reader or a Magnetic Swipe Reader the PaceBook RP550 is the ideal partner in a wide range of working conditions.

PaceBook **RP550**

PaceBook RP550

Processor:	Intel Atom Z530P / 1,6 GHz / 512 KB L2 cache / 533 MHz FSB
Operating Systems:	Windows 7 Professional Windows Vista Business / Ultimate Windows XP Professional Edition (On Request)
Memory:	1 GB DDR 2 upgradable to 2 GB
Harddisk Drive:	Compact Flash Card 1.8" PATA 120 GB Hard Disk Drive Solid State Disc
Communication:	Wireless LAN - Wi-Fi 802.11a/b/g/n Bluetooth - Integrated Class 2, compliant with version 2.0 + EDR Optional: 3G WWAN (HSDPA / UMTS / GPRS / EDGE / GSM) integrated
Graphics:	Intel GMA 500 provides integrated 2D and 3D graphics (OpenGL 2.0) MPEG-2 / MPEG-4 / H.264 / VC-1 / WMV-9 HD video decoder Shader model 4.0 / DirectX 9.1 compatible
CMOS Camera:	Integrated 2.0 Mpixels CCD Camera
GPS Receiver:	Optional: Integrated SiRF 3 GPS receiver
Resolution:	1024 x 768 - LCD display Display can rotate (90° / 180° / 270°)
Display:	10.4" LED backlit TFT, XGA panel Optional: LED backlit Sunlight Readable Display
Input device:	Resistive Touch Panel Fingerprint scanner
Expansion Slot:	1 x SD Card slot 1 x Dockingstation connector
Sound:	Intel HD Audio interface with Realtek ALC262 HD Audio Codec. Build-in stereo speakers and microphone
I/O Ports:	1 x DC-in jack 2 x USB 2.0 port 1 x Serial (RS-232 / RS-422 / RS-485) 1 x VGA connector 1 x Dockingstation connector 1 x Stereo headphone 1 x Microphone
One Touch Buttons:	Power button On-Screen Keyboard button Mode button Enter button 2 x Barcode / Camera switch buttons 3 x User programmable buttons
Battery:	Li-ion smart batteries (1900 mAh / 11.1 V) Optional: Hot swappable external Li-ion smart batteries (3800 mAh / 11.1 V)
Dimensions & Weight:	276 x 213 x 18 mm 1.2 Kg
Included Accessories:	Stylus, AC-adaptor and Power cord Rubber bumpers and 3M cleaning cloth
Temperature:	Operation: 0°C to +40°C Storage: -20°C to +60°C
Humidity:	Operation: 5% to 95%
Rugged Rating:	Meet IEC 60529, IP-54 standard 90 cm drop to concrete
Factory Options:	RFID reader 1D Barcode reader / 2.0 Mpixel Camera Magnetic Swipe Reader (1+2+3 Track Card Reader)
Optional:	Dockingstation (adds 2 x USB2.0, RS-232, LAN, External battery charging slot) Vesa mount Hand strap / Shoulder strap
Safety Certification:	EMI FCC, CE



PaceBlade
t e c h n o l o g y

De Stuwdam 61
3815 KM Amersfoort
Tel: +31 33 422 93 00
Fax: +31 33 422 93 00
Email: info@paceblade.com
Web: www.paceblade.com

