

10.4" Rugged PC



PaceBlade

WHEN TOUGH MEETS POWER...

The new Pacebook RP600 is the next generation tablet PC's that combines Ruggedized toughness with processing Power.

Powered by an Intel Core 2 Duo U7500 processor, this slate-style Pacebook RP600, featured with a 10.4" XGA Sunlight readable TFT display is compliant with the MIL-STD-810F and MIL-STD-461E standard and is rated IP65.

The PaceBook RP600 is easy to use by means of the Resistive Touch Panel, the 12 buttons numeric keypad and the Navigation buttons.

And with the rich I/O port array which consists of USB 2.0 ports, Serial ports, VGA port, audio ports, PCMCIA slots, Compact Flash slots and a Fast Ethernet LAN port and the numerous communication options, like Wireless LAN, Bluetooth and 3G WWAN built-in, the Pacebook RP600 is suited to take on any task, in any place and under any condition.



MIL-STD-810F
MIL-STD-461E
IEC 60529 IP65

Resistive Touch Panel, Numeric Buttons and Navigation Buttons for easy software control




PaceBook **RP600**

PaceBook RP600



Processor:	Intel Core 2 Duo / 1.06 GHz / 2MB L2 cache / 533 MHz FSB
Operating Systems:	Windows 7 Professional Windows Vista Business / Ultimate Windows XP Tablet Edition (On Request)
Memory:	2GB DDR 2
Harddisk Drive:	2.5" SATA 80 GB Hard Disk Drive - Optional: Compact Flash Memory Card
Communication:	10 / 100 / 1000 LAN on board Wireless LAN - Wi-Fi 802.11a/b/g Bluetooth - Integrated Class 2, compliant with version 2.0 + EDR 3G WWAN Mini PCI ExpressCard (HSPA+ / HSUPA / HSDPA / WCDMA / UMTS / GPRS / EDGE / GSM)
Graphics:	Intel GMA X3100 provides integrated 2D and 3D graphics (OpenGL 2.0) MPEG-2 / MPEG-4 / H.264 / VC-1 / WMV-9B HD video decoder Shader model 4.0 / DirectX 10 compatible
GPS Receiver:	Optional: Integrated SIRF 3 GPS receiver with SIM card slot
Resolution:	1024 x 768 - LCD display Display can rotate (90° / 180° / 270°)
Display:	10.4" Bright CFT backlit TFT, XGA panel Optional: Transflective LED backlit, anti glare Sunlight Readable Display
Input device:	Resistive Touch Panel
Expansion Slot:	1 x PCMCIA Type II slot, supports Cardbus 2.1 1 x Compact Flash Type II slot 1 x Docking Station Connector
Sound:	Intel HD Audio interface with Realtek ALC260 HD Audio Codec. Build-in stereo speakers and microphone
I/O Ports:	1 x DC-in jack 2 x USB 2.0 port 2 x Serial port (RS-232 / RS-422 / RS-485) 1 x RJ-45 fast Ethernet port 1 x VGA connector 1 x Dockingstation connector 1 x Stereo headphone 1 x Microphone
One Touch Buttons:	Power button On-Screen Keyboard button Brightness / Volume button 12 x Numeric buttons (0 to 9, #, *) 4 x Navigation buttons with integrated Enter button 3 x User programmable buttons
Battery:	Li-ion smart battery (5200 mAh / 11.1 V)
Dimensions & Weight:	310 x 236 x 42 mm 2.9 Kg
Included Accessories:	Stylus, AC-adaptor and power cord 3M cleaning cloth
Temperature:	Operation: -20°C to +60°C Storage: -40°C to +70°C
Humidity:	Operation: 5% to 95%
Rugged Rating:	MIL-STD 810F compliant (90 cm drop to concrete/ Water sealing / Vibration) MIL-STD 461E compliant (Electro Magnetic Interference) Meet IEC 60529 IP65 standard (Water sealing / Dust proof)
Optional:	Dockingstation (adds 2 x USB2.0 and 2 x RS-232) Vesa mount / Vehicle mount Hand strap / Shoulder strap Holster
Safety Certification:	EMI FCC, CE, VCCI, ETL, Semko, C-Tick

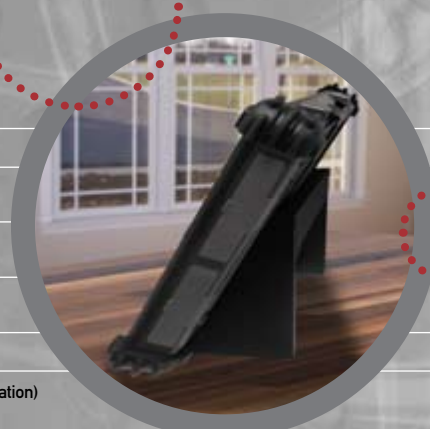

PaceBlade
t e c h n o l o g y

De Stuwdam 61
3815 KM Amersfoort
Tel: +31 33 422 93 00
Fax: +31 33 422 93 30
Email: info@paceblade.com
Web: www.paceblade.com

